


LC-4103 Series

Loadcells

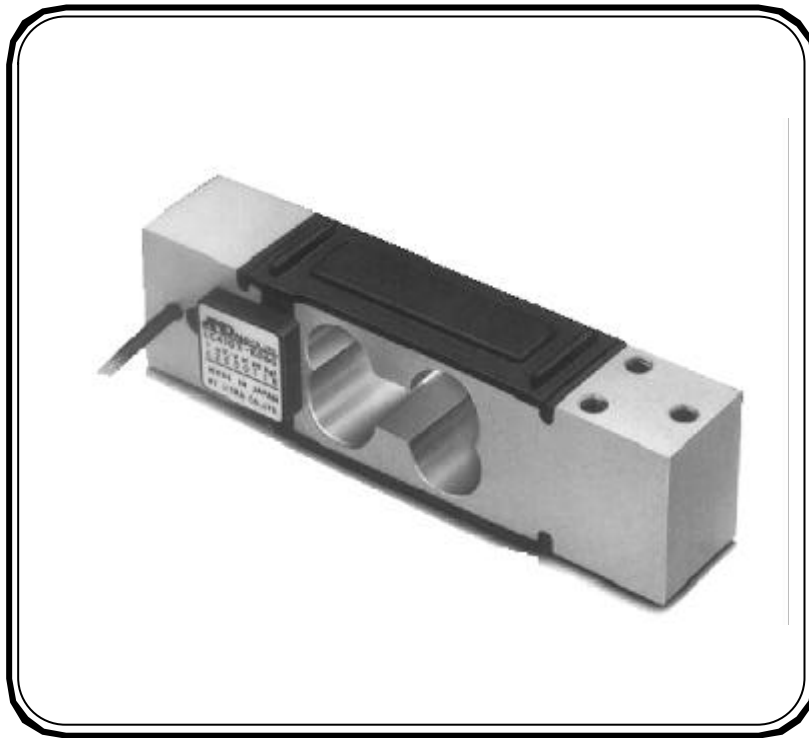

- An aluminium single point loadcell
- Available with or without waterproofing
- Parallelogram type construction for reliability and strength
- Three capacities suitable for industrial scale applications
- Temperature compensated from -10°C ~ $+40^{\circ}\text{C}$

LC-4103 Series

Loadcells

Specifications


Rated Capacities	60kgf, 100kgf, 150kgf
Rated Output	1mV/V+15% -0
Maximum safe overload	300% of rated capacity
Combined error	+/-0.015% of rated output
Creep	+/-0.05% of rated output/hour
Zero balance	20 +/-5% of rated output
Recommended excitation voltage	12V
Maximum excitation voltage	15V
Input terminal resistance	Approximately 400ohms
Output terminal resistance	350+/-5ohms
Insulation resistance	> 5000Megohms at DC50V
Typical cable length	2metres

Dimensions

All dimensions are in millimetres

Cable Colour Code

RED	EXC+
WHITE	EXC-
GREEN	SIG+
BLUE	SIG-
YELLOW	SHIELD

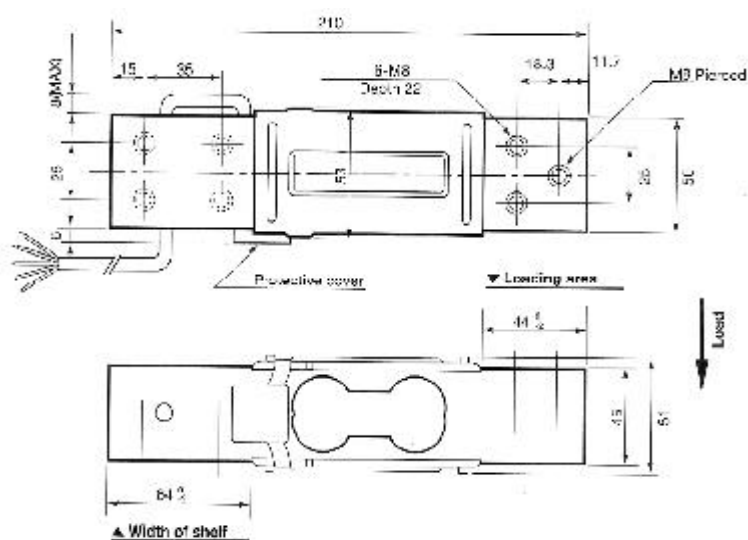

Supplied by

Perth Scale & Slicer Service

Unit 1, 195 Bannister Road

Canning Vale WA 6155

PH: 08 9256 2544

Web: www.perthscales.com.au

A&D
A&D MERCURY PTY. LTD