

# SPIDOGLASS

GLASS CERAMIC CONTACT COOKING SYSTEMS



# THE BENEFITS OF SPIDOCGLASS



## **COOKING QUALITY** **Uniform heat distribution**

The combination of glass ceramic tops an innovative heating system guarantees uniform heat in both the centre and at the sides of the cooking surface and ensures the food's original flavour is maintained.

Find out more on pages 2 and 3



## **MAXIMUM VERSATILITY** **400°C to cook what you want**

The possibility of reaching 400°C allows you to not only heat up panini and toasted sandwiches, but also to cook a wide variety of different food, such as fish, meat, vegetables, eggs etc. Find out more on Find out more on pages 4 and 5



## **SAVING TIME AND ENERGY** **Reduced time by 60% and make annual energy savings of up to 600 kWh**

Working speed and thermal efficiency allow savings of up to 60% in the thermal increase times and therefore also in annual energy consumption.

Find out more on pages 6 and 7



## **EASY CLEANING AND MAINTENANCE** **Easy to clean and always ready to use**

No smoke during cooking, simple and effective cleaning after use, specific products to maintain maximum performance over time.

Find out more on pages 8 and 9



## GLASS CERAMIC THE BEST SURFACE FOR COOKING

- RESISTANCE ✓
- NO SMOKE ✓
- EASY CLEANING ✓

Glass ceramic is the perfect material for contact cooking. Resistant to impact and thermal shock, impermeable to smells and tastes, it does not absorb the taste of food and allows different products to be cooked one after another while maintaining their taste and fragrance.

Thanks to the non-stick features of the material, the smoke generated during cooking is greatly reduced and the cleaning operations are simple and quick, eliminating the risk of unpleasant odours due to food residues on the cooking surfaces.



## SPECIAL HEATING BOX PERFORMANCE AND SPEED WITHOUT COMPROMISE

- ✓ COMBINED HEATING
- ✓ UNIFORM HEAT
- ✓ FAST HEATING

SHB Plus technology uses non-armoured heating elements that allow cooking with a mixed heating system, by contact and by infrared radiation.

The shape of the heating filament has been specially developed to guarantee a uniform heat distribution over the entire plate, both in the centre and at the sides. The filament reaches a temperature of 800°C, at which the emission of infrared rays occurs. The glass ceramic tops allow a pre-established amount to filter through, which reaches and warms the food directly at the core.

The SHB Plus technology quickly reaches a maximum temperature of 400°C on the plate, thus reducing thermal increase times by more than 60%.

## HIGH TEMPERATURES 400°C MEANS COOKING WHAT YOU WANT

Why limit yourself just to heating up panini, wraps and toasted sandwiches?














































Today, SpidoGlass offers a real contact cooking system that lets you prepare a complete menu for your clients: tasty beef burgers, delicate pieces of salmon, delicious seasonal vegetables, sophisticated prawns, soft and tender chicken fillets and crispy bacon.

Each of these foods needs a correct cooking temperature, in all cases higher than those available with traditional products. SpidoGlass contact cooking systems can reach a temperature of 400°C, providing you the versatility needed to expand your business.



### WHAT FOOD CAN YOU PREPARE WITH A TRADITIONAL CONTACT GRILL?

### WHAT FOOD CAN YOU PREPARE WITH SPIDOGLOSS?

	<b>PRAWNS</b>		<b>400°C</b>	
	<b>CHICKEN BREAST</b>		<b>390°C</b>	
	<b>SALMON</b>		<b>380°C</b>	
	<b>RADICCHIO</b>		<b>380°C</b>	
	<b>SEABASS FILLET</b>		<b>380°C</b>	
	<b>BACON</b>		<b>380°C</b>	
	<b>EGGS</b>		<b>380°C</b>	
	<b>MUSHROOMS</b>		<b>350°C</b>	
	<b>BREADED CHICKEN CUTLET</b>		<b>350°C</b>	
	<b>COURGETTES</b>		<b>350°C</b>	
	<b>HAMBURGERS</b>		<b>300°C</b>	
	<b>TOASTED SANDWICH</b>		<b>300°C</b>	
	<b>TOAST</b>		<b>280°C</b>	
	<b>FLATBREAD</b>		<b>280°C</b>	
	<b>FOCACCIA BREAD</b>		<b>240°C</b>	

## HIGH EFFICIENCY INSULATION

### EFFICIENCY FOR YOUR BUSINESS, SAFETY FOR YOUR TEAM


- HIGH THERMAL INSULATION ✓
- QUICK THERMAL INCREASE TIME ✓
- REDUCED ENERGY CONSUMPTION ✓

The Protek.SAFE technology eliminates unnecessary energy loss, reducing energy consumption to a minimum and therefore allowing all the heating energy to be concentrated on the cooking surface, with obvious benefits also for the safety of those who work with the product.

SpidoGlass electric contact cooking systems significantly increase the heating speed of the plates without needing more power. The high thermal insulation minimizes energy consumption during standby cycles, making the product always ready for any request without sacrificing the energy efficiency of your business.



## TIME SAVINGS

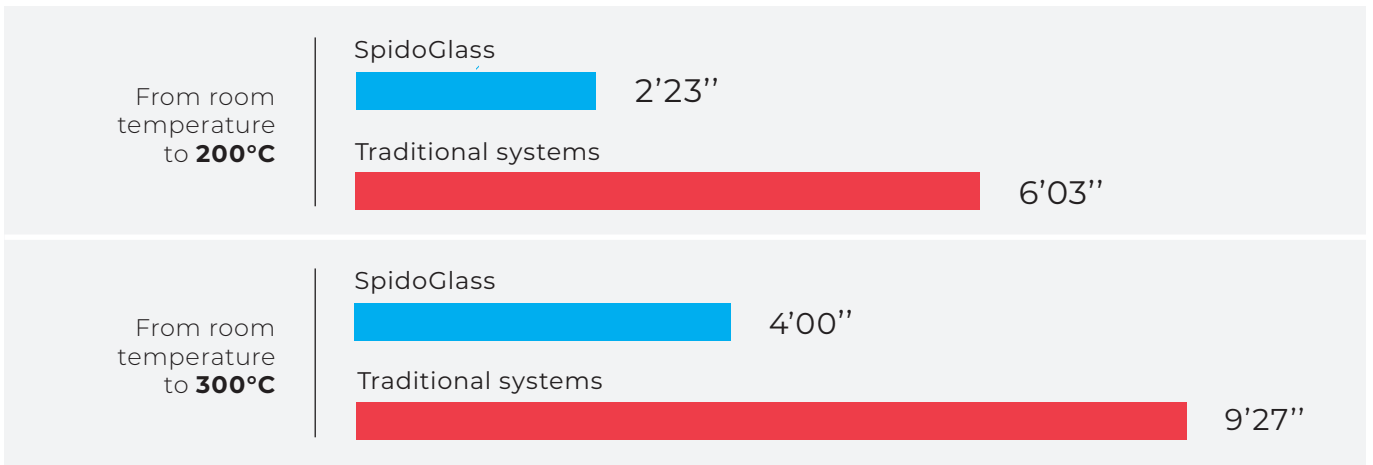


## ENERGY SAVING

### STANDBY POWER CONSUMPTION


	SpidoGlass	Traditional systems
1h / 150°C	45 Wh	230 Wh
1h / 250°C	92 Wh	462 Wh
1h / 300°C	130 Wh	572 Wh

### ANNUAL ENERGY CONSUMPTION

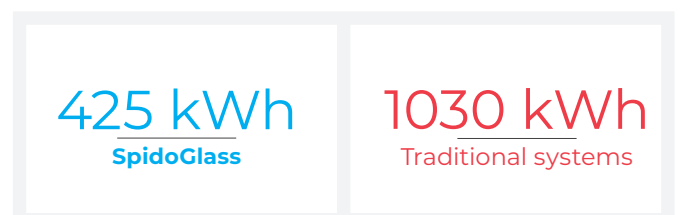

\*Annual consumption (250 days) in kWh on a 4 hour working/ 2 hour standby cycle at 300°C with double electric contact grill.

# Easy cleaning and maintenance

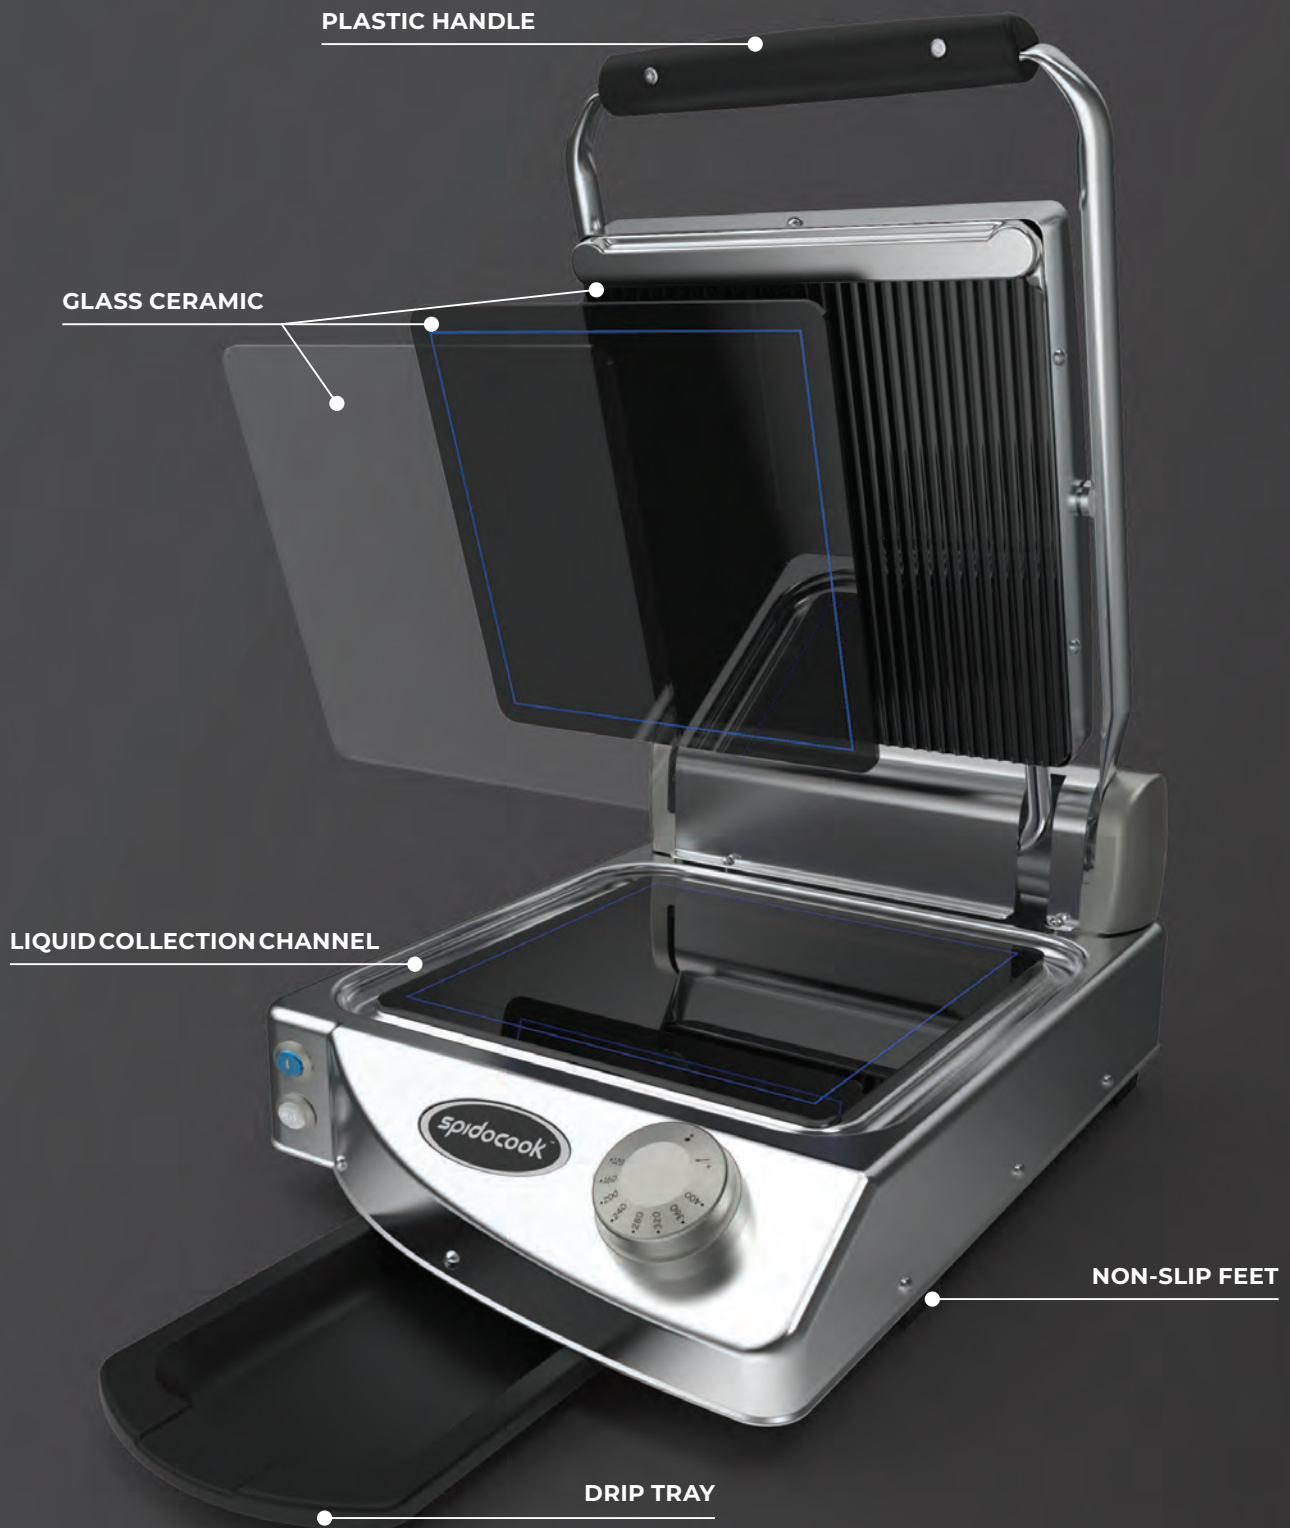

## MAINTENANCE HYGIENE AND CLEANING

- NON-STICK GLASS CERAMIC ✓
- REMOVABLE TRAY ✓
- DEDICATED ACCESSORIES ✓

The difficulties in cleaning cooking plates using traditional technologies make it very hard to completely remove food residues, which remain in contact with the surface, and become a source of smoke during subsequent cooking and, in general, of unpleasant odours.

SpidoGlass electric contact cooking systems use glass ceramic plates, a smooth non-stick and non-porous material that allows you to remove food residues simply and effectively, thus preventing unpleasant odours and providing maximum hygiene.

At cold temperatures, the rounded liquid overflow channel, which is around the outer edge of the cooking surface, allows residues and liquids to be easily conveyed to a removable tray, to further facilitate cleaning operations.



## SPECIFIC CLEANING ACCESSORIES KEEP PERFORMANCE CONSTANT OVER TIME

Specially developed and tested, SpidoClean spray detergent is the perfect product for cleaning the plates and steel structure of the SpidoGlass electric contact cooking system. Its combined use with the scraper supplied with the electric contact cooking system guarantees fast and effective cleaning and hygiene.

Thanks to SpidoClean, with just a few steps at the end of each day you can always have a ready to use electric contact cooking system. that maintains its performance over time.



**MODEL:** SpidoClean

**CODE:** DB1046A0

**TYPE:** Spray detergent

**CONTENTS:** 750 ml

**QTY FOR PACKAGING** 12 bottles

## LOOKING FOR PRODUCTIVITY AND TIME SAVINGS? TRANSPARENT SMOOTH SURFACES

### TECHNICAL SPECIFICATIONS

**PLATE SIZE:** 250x250 mm  
**HEATING:** SHB.Plus  
**FREQUENCY:** 50/60Hz



**MODEL:** Manual: SP010PT | Digital: SP010ET  
**WEIGHT:** 10 Kg  
**POWER:** 1,5 kW - 10 Amp  
**SIZE:** 331 x 458 x 176 mm  
(WXDXH)  
**PACKAGING SIZE:** 368 x 528 x 240 mm  
**AMOUNT PER PALLET:** 24



**MODEL:** Manual: SP020PT | Digital: SP020ET  
**WEIGHT:** 17 Kg  
**POWER:** 3 kW - 15 Amp  
**SIZE:** 619 x 458 x 176 mm  
(WXDXH)  
**PACKAGING SIZE:** 660 x 368 x 240 mm  
**AMOUNT PER PALLET:** 12

## LOOKING FOR VERSATILITY AND MAXIMUM PERFORMANCE? BLACK SMOOTH SURFACES

### TECHNICAL SPECIFICATIONS

**PLATE SIZE:** 250x250 mm  
**HEATING:** SHB.Plus  
**FREQUENCY:** 50/60Hz



**MODEL:** Manual: SP010P | Digital: SP010E  
**WEIGHT:** 10 Kg  
**POWER:** 1,5 kW - 10 Amp  
**SIZE:** 331 x 458 x 176 mm  
(WXDXH)  
**PACKAGING SIZE:** 368 x 528 x 240 mm  
**AMOUNT PER PALLET:** 24



**MODEL:** Manual: SP020P | Digital: SP020E  
**WEIGHT:** 17 Kg  
**POWER:** 3 kW - 15 Amp  
**SIZE:** 619 x 458 x 176 mm  
(WXDXH)  
**PACKAGING SIZE:** 660 x 368 x 240 mm  
**AMOUNT PER PALLET:** 12

## LOOKING FOR VERSATILITY AND MAXIMUM PERFORMANCE? BLACK RIBBED TOP PLATE & SMOOTH BOTTOM PLATE

### TECHNICAL SPECIFICATIONS

**PLATE SIZE:** 250x250 mm  
**HEATING:** SHB.Plus  
**FREQUENCY:** 50/60Hz



**MODEL:** Manual: SP010PR | Digital: SP010ER  
**WEIGHT:** 10 Kg  
**POWER:** 1,5 kW - 10 Amp  
**SIZE:** 331 x 458 x 176 mm  
(WXDXH)  
**PACKAGING SIZE:** 368 x 528 x 240 mm  
**AMOUNT PER PALLET:** 24



**MODEL:** Manual: SP020PR | Digital: SP020ER  
**WEIGHT:** 17 Kg  
**POWER:** 3 kW - 15 Amp  
**SIZE:** 619 x 458 x 176 mm  
(WXDXH)  
**PACKAGING SIZE:** 660 x 368 x 240 mm  
**AMOUNT PER PALLET:** 12

# LOW CONSUMPTION: THE ECO RANGE 10 AMP VERSION



TRANSPARENT SMOOTH SURFACE | SMOOTH BLACK | RIBBED BLACK TOP

## TECHNICAL SPECIFICATIONS

**PLATE SIZE:** 250x250 mm  
**HEATING:** SHB.Plus  
**FREQUENCY:** 50/60Hz



**MODEL:** Manual: SP020T  
**WEIGHT:** 17 Kg  
**POWER:** 2 kW - 10 Amp  
**SIZE:** 619 x 458 x 176 mm  
 (WXDXH)  
**PACKAGING SIZE:** 660 x 368 x 240 mm  
**AMOUNT PER PALLET:** 12



**MODEL:** Manual: SP020  
**WEIGHT:** 17 Kg  
**POWER:** 2 kW - 10 Amp  
**SIZE:** 619 x 458 x 176 mm  
 (WXDXH)  
**PACKAGING SIZE:** 660 x 368 x 240 mm  
**AMOUNT PER PALLET:** 12



**MODEL:** Manual: SP020R  
**WEIGHT:** 17 Kg  
**POWER:** 2 kW - 10 Amp  
**SIZE:** 619 x 458 x 176 mm  
 (WXDXH)  
**PACKAGING SIZE:** 660 x 368 x 240 mm  
**AMOUNT PER PALLET:** 12

# LARGE PLATE: TRANSPARENT SMOOTH SURFACE | SMOOTH BLACK | RIBBED BLACK TOP - PLATE SIZE 300x400mm



### POWER VERSION

**MODEL:** Manual: SP015PT  
**WEIGHT:** 13 Kg  
**POWER:** 3 kW - 15 Amp  
**SIZE:** 481 x 457 x 182 mm  
 (WXDXH)  
**PACKAGING SIZE:** 540 x 527 x 254 mm  
**AMOUNT PER PALLET:** 12

### ECO 10 AMP VERSION

**MODEL:** Manual: SP015T  
**WEIGHT:** 13 Kg  
**POWER:** 2 kW - 10 Amp  
**SIZE:** 481 x 457 x 182 mm  
 (WXDXH)  
**PACKAGING SIZE:** 540 x 527 x 254 mm  
**AMOUNT PER PALLET:** 12



### POWER VERSION

**MODEL:** Manual: SP015P  
**WEIGHT:** 13 Kg  
**POWER:** 3 kW - 15 Amp  
**SIZE:** 481 x 457 x 182 mm  
 (WXDXH)  
**PACKAGING SIZE:** 540 x 527 x 254 mm  
**AMOUNT PER PALLET:** 12

### ECO 10 AMP VERSION

**MODEL:** Manual: SP015P  
**WEIGHT:** 13 Kg  
**POWER:** 2 kW - 10 Amp  
**SIZE:** 481 x 457 x 182 mm  
 (WXDXH)  
**PACKAGING SIZE:** 540 x 527 x 254 mm  
**AMOUNT PER PALLET:** 12




### POWER VERSION

**MODEL:** Manual: SP015PR  
**WEIGHT:** 13 Kg  
**POWER:** 3 kW - 15 Amp  
**SIZE:** 481 x 457 x 182 mm  
 (WXDXH)  
**PACKAGING SIZE:** 540 x 527 x 254 mm  
**AMOUNT PER PALLET:** 12

### ECO 10 AMP VERSION

**MODEL:** Manual: SP015R  
**WEIGHT:** 13 Kg  
**POWER:** 2 kW - 10 Amp  
**SIZE:** 481 x 457 x 182 mm  
 (WXDXH)  
**PACKAGING SIZE:** 540 x 527 x 254 mm  
**AMOUNT PER PALLET:** 12

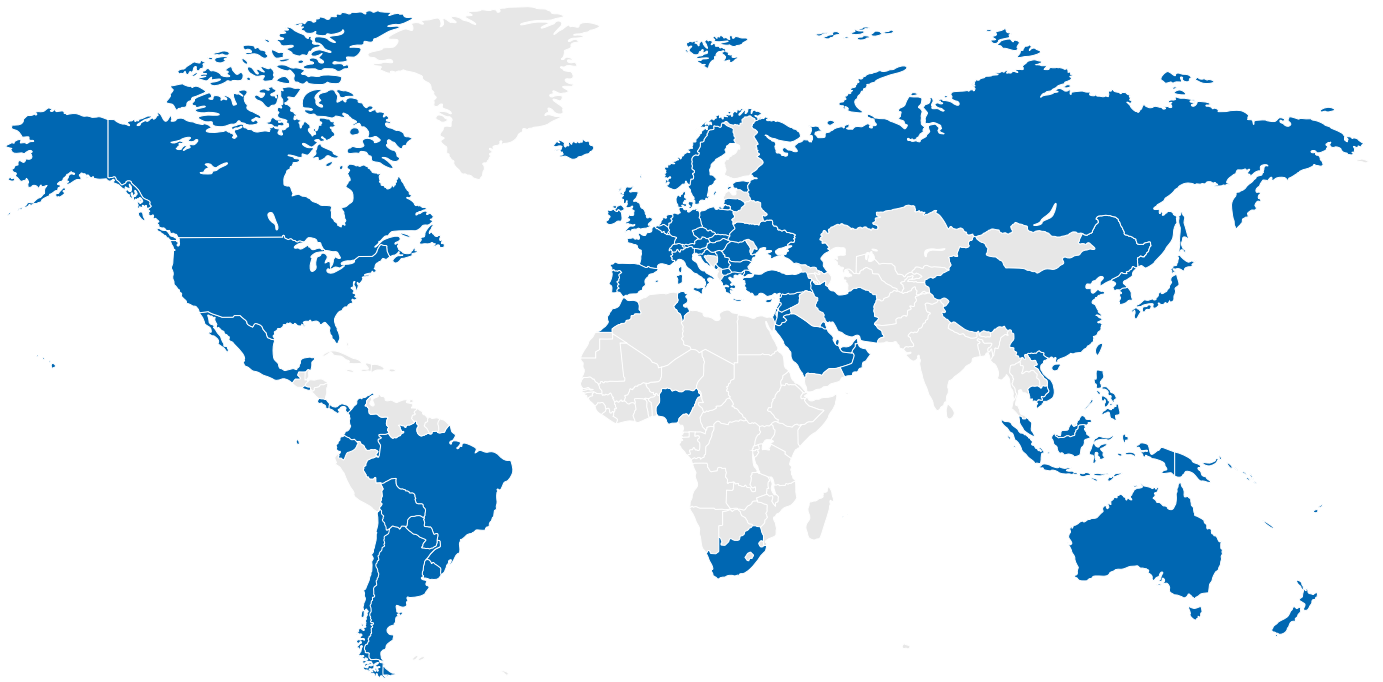

# spidocook™

PROFESSIONAL BY DESIGN

Technology, design, performance have been part of our DNA since 1993, when Spidocook entered the world of professional cooking.

Today, with sales and deliveries in over 60 countries worldwide, SpidoCook is a truly global partner for all operators that are looking for quality professional cooking solutions.

Printed: 06-2018  
The photos used in this catalogue are for demonstration purposes only.  
All data contained in this catalogue may change and be modified without prior notice.



**W.A. DISTRIBUTOR**  
**PERTH SCALE & SLICER SERVICE**

UNIT 1/195 BANNISTER ROAD CANNING VALE W.A. 6155  
PH: 08 9256 2544 WEB: [www.perthscopes.com.au](http://www.perthscopes.com.au)