


A Versatile Scale with a Compact Body



A Simple Scale with Broad Application

Features

Compact & Versatile

The iPC is a portable scale with a compact design.
It allows users to measure weights of items from 1 g to 30 kg.

Dual Power Operation

Use iPC with an AC adaptor (optional) or batteries (sold separately) depending on usage.
Two alkaline batteries allow an operation as long as 500 hours, and an indicator lets you know when to change batteries.
Auto Power Off function saves power and ensures long battery life.

Large Display Panel

The LCD panel is large and positioned at an angle for easy viewing to prevent misreading. A dual display (front and back) model is also available on order.




Specifications

| | <Small> | | <Large> | |
|---------------------------------|---|-------------------|---|-------------------|
| Platter size | 230 x 200 mm | | 280 x 293 mm | |
| Capacity and minimum graduation | Approval type | Non approval type | Approval type | Non approval type |
| | 3 kg/ 1 g (0 ~ 1.5 kg), 2 g (1.5 ~ 3 kg) | 3 kg/1 g | 15 kg/ 5 g (0 ~ 7.5 kg), 10 g (7.5 ~ 15 kg) | 15 kg/5 g |
| | 6 kg/ 2 g (0 ~ 3 kg), 5 g (3 ~ 6 kg) | 6 kg/2 g | 30 kg/ 10 g (0 ~ 15 kg), 20 g (15 ~ 30 kg) | 30 kg/10 g |
| | | | | |
| Weighing method | Electric resistance method | | | |
| LCD panel | Six digits (7-segment), character height 25 mm | | | |
| Display information | 6-digit weight, battery indicator, decimal point, net weight indicator, stability indicator, minus sign, and unit of measurement | | | |
| Net weight measurement | Subtraction of tare weight by key input | | | |
| Power | Dry Cell 2 pieces (can be operated for 500 hours with alkaline dry D-Type batteries) or AC Adaptor (No Dry Cell and/or AC adaptor are included in the shipment) Auto Power Off function (can be set to 60 min., 20 min., or off) | | | |
| Operational temperature | -5 °C ~ 40 °C | | | |
| Outer dimensions (W x D x H) | 236 x 282 x 100 mm | | 286 x 363 x 102 mm | |
| Weight | 2.0 kg (excluding batteries) | | 3.2 kg (excluding batteries) | |
| Approvals | OIML, CE conformity for approval type | | | |


Dimensions

unit: mm

iPC (Small)

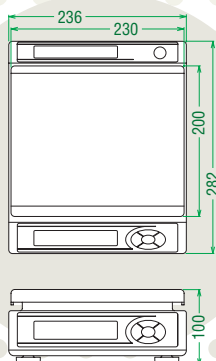

iPC (Large)

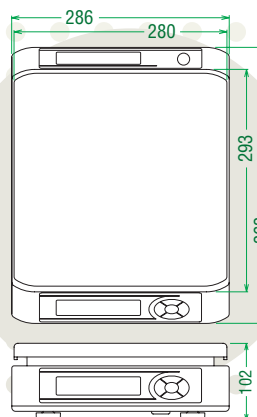

ISHIDA CO., LTD.

44 SANNO-CHO, SHOGIN, SAKYO-KU
KYOTO, 606-8392 JAPAN
PHONE : 81-75-771-4141
FACSIMILE : 81-75-751-1634
URL : <http://www.ishidajapan.com>

Specifications subject to change without notice

Perth Scale & Slicer Service

Unit 1, 195 Bannister Road

Canning Vale WA 6155

Phone: 08 9256 2544

Email: info@perthscales.com.au

Web: <http://perthscales.com.au>